


## LK-80A

80A IEC 60947-7-1  
85 Amp




IP20

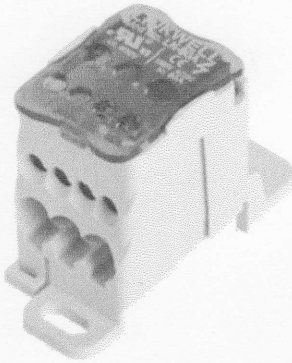

### Modular:

Keeping only one input, the blocks can be connected in parallel using a jumper wire. Easily double or triple the neutral.

### ■ Dimensions



|                   |
|-------------------|
| I=80A IEC         |
| I=85A UL/CSA      |
| □ Icw KA rms Is:3 |
| □ IPK KA:22       |
| □ Ui: 1000V IEC   |
| 600V UL           |

### ■ Metric \*\* or common jumper

| Unit | mm²      |    |  | I'(N.m) |
|------|----------|----|--|---------|
|      | 6...16   | X1 |  | 3.5     |
|      | 2.5...6  | X4 |  | 1.2     |
|      | 2.5...16 | X2 |  | 3.5     |


### ■ Imperial

| Unit | AWG    |    |  | Torque Inch/Lbs. |
|------|--------|----|--|------------------|
|      | 16...4 | X1 |  | 19.5             |
|      | 16...8 | X4 |  | 10.6             |
|      | 16...4 | X2 |  | 19.5             |

### Modular:

Keeping only one input, the blocks can be connected in parallel using a jumper wire. Easily double or triple the neutral.

### ■ Dimensions



|                     |
|---------------------|
| I=125A IEC          |
| I=150A UL/CSA       |
| □ Icw KA rms Is:4.2 |
| □ IPK KA:30         |
| □ Ui: 1000V IEC     |
| 600V UL             |

### ■ Metric \*\* or common jumper

| Unit | mm²      |    |  | I'(N.m) |
|------|----------|----|--|---------|
|      | 10...35  | X1 |  | 8.5     |
|      | 6...16** | X1 |  | 3.5     |
|      | 2.5...16 | X6 |  | 3.5     |

### ■ Imperial


| Unit | AWG     |    |  | Torque Inch/Lbs. |
|------|---------|----|--|------------------|
|      | 8...1/0 | X1 |  | 57               |
|      | 14...2  | X1 |  | 31               |
|      | 14...4  | X6 |  | 31               |

### ■ Accessories UJ



## LK-125A

125A IEC 60947-7-1  
150 Amp

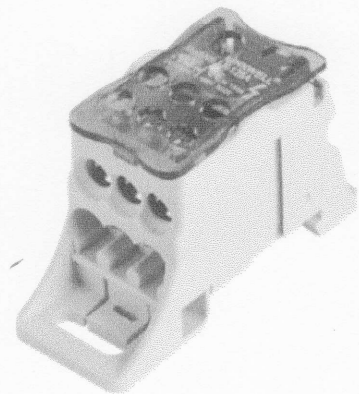


IP20



## LK-160A

160A IEC 60947-7-1  
200 Amp

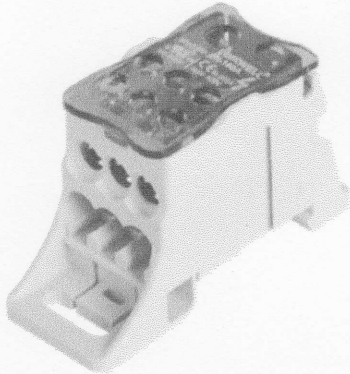


IP20



### Modular:

Keeping only one input, the blocks can be connected in parallel using a jumper wire. Easily double or triple the neutral.

### ■ Dimensions



|                       |
|-----------------------|
| I=160A IEC            |
| I=200A UL/CSA         |
| □ Icw KA rms Is: 11.8 |
| □ IPK KA: 30          |
| □ Ui: 1000V IEC       |
| 600V UL               |

### ■ Metric \*\*or common jumper

| Unit | mm <sup>2</sup> |    |  | Γ(N.m) |
|------|-----------------|----|--|--------|
|      | 10...70         | X1 |  | 8.5    |
|      | 6...16**        | X1 |  | 3.5    |
|      | 2,5...16        | X6 |  | 3.5    |

### ■ Imperial

| Unit | AWG     |    |  | Torque Inch/Lbs. |
|------|---------|----|--|------------------|
|      | 8...3/0 | X1 |  | 75               |
|      | 14...2  | X1 |  | 31               |
|      | 14...4  | X6 |  | 31               |


### ■ Accessories UJ



### Modular:

Allows versatile building of power blocks single pole, two pole, three pole or four pole.

### ■ Dimensions



|                       |
|-----------------------|
| I=250A IEC            |
| I=255A UL/CSA         |
| □ Icw KA rms Is: 24.5 |
| □ IPK KA: 51          |
| □ Ui: 1000V IEC       |
| 600V UL               |

### ■ Metric \*\*or common jumper

| Unit | mm <sup>2</sup> | mm <sup>2</sup> |    |  | Γ(N.m) |
|------|-----------------|-----------------|----|--|--------|
|      | 35...120        |                 | X1 |  | 19     |
|      | 6...35          | 6...25          | X2 |  | 4.4    |
|      | 2.5...16        | 2.5...16        | X5 |  | 2.7    |
|      | 2.5...10        | 2.5...10        | X4 |  | 2.7    |

### ■ Imperial


| Unit | AWG           |    |  | Torque Inch/Lbs. |
|------|---------------|----|--|------------------|
|      | 6...250 Kcmil | X1 |  | 221              |
|      | 14...1        | X2 |  | 39               |
|      | 14...4        | X5 |  | 24               |
|      | 14...6        | X4 |  | 24               |

### ■ Accessories TF 250A



## LK-250A

250A IEC 60947-7-1  
255 Amp

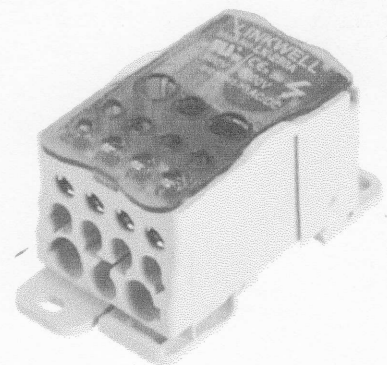


IP20



## LK-400A

400A IEC 60947-7-1  
355 Amp

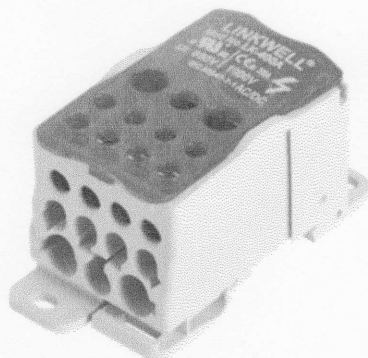

IP20

cULus

CE


RoHS

UL94-V0

### Modular:

Allows versatile building of power blocks single pole, two pole, three pole or four pole.

#### ■ Dimensions



|                      |
|----------------------|
| I=400 A IEC          |
| I=355 A UL/CSA       |
| □ Icw KA rms Is:24.5 |
| □ IPK KA:51          |
| □ Ui:1000V IEC       |
| 600V UL              |

#### ■ Metric \*\* or common jumper

| Unit | mm <sup>2</sup> | mm <sup>2</sup> |    |  | Γ(N.m) |
|------|-----------------|-----------------|----|--|--------|
|      | 95...185        |                 | X1 |  | 25     |
|      | 6...35          | 6...25          | X2 |  | 4.4    |
|      | 2.5...16        | 2.5...16        | X5 |  | 2.7    |
|      | 2.5...10        | 2.5...10        | X4 |  | 2.7    |

#### ■ Imperial

| Unit | AWG             |    |  | Torque<br>Inch/Lbs. |
|------|-----------------|----|--|---------------------|
|      | 3/0...400 kcmil | X1 |  | 221                 |
|      | 14...1          | X2 |  | 39                  |
|      | 14...4          | X5 |  | 24                  |
|      | 14...6          | X4 |  | 24                  |


#### ■ Accessories TF 400A



### Modular:

Allows versatile building of power blocks single pole, two pole, three pole or four pole.

#### ■ Dimensions



|                      |
|----------------------|
| I=500 A IEC          |
| I=520 A UL/CSA       |
| □ Icw KA rms Is:24.5 |
| □ IPK KA:51          |
| □ Ui:1000V IEC       |
| 600 V UL             |

#### TH flexible busbar

|                |
|----------------|
| 4 x 15.5 x 0.8 |
| 6 x 15.5 x 0.8 |
| 2 x 20 x 1     |
| 3 x 20 x 1     |
| 4 x 20 x 1     |
| 5 x 20 x 1     |
| 6 x 20 x 1     |
| 2 x 24 x 1     |
| 3 x 24 x 1     |
| 4 x 24 x 1     |
| 5 x 24 x 1     |
| 6 x 24 x 1     |
| 8 x 24 x 1     |

#### ■ Metric \*\* or common jumper

| Unit | mm <sup>2</sup>   | mm <sup>2</sup>   |    |  | Γ(N.m) |
|------|-------------------|-------------------|----|--|--------|
|      | 4x15,5x0.8,6x24x1 | 4x15,5x0.8,6x24x1 |    |  | 10     |
|      | 6...35            | 6...25            | X2 |  | 4.4    |
|      | 2.5...16          | 2.5...16          | X5 |  | 2.7    |
|      | 2.5...10          | 2.5...10          | X4 |  | 2.7    |

#### ■ Imperial


| Unit | AWG               |    |  | Torque<br>Inch/Lbs. |
|------|-------------------|----|--|---------------------|
|      | 4x15,5x0.8,6x24x1 |    |  | 88.5                |
|      | 14...1            | X2 |  | 39                  |
|      | 14...4            | X5 |  | 24                  |
|      | 14...6            | X4 |  | 24                  |

## LK-500A

500A IEC 60947-7-1

520 Amp

Connected with Flexible busbar

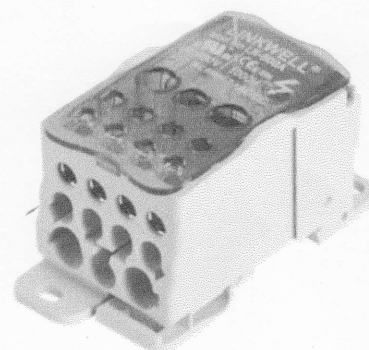

IP20

cULus

CE

RoHS

UL94-V0